

Specification and scope of supply of P70.20

Description	Specification/scope of supply
Max component length	1000mm
Max component width	667mm
Max component thickness	235mm
Max component weight	50kg – UDL (Uniformly Distributed Load)
Measuring accuracy, length & width**	+/- 20 / 40µm*
Measuring accuracy, height** (optional with Surfscan)	+/- 150 µm
Point Spacing	0.18mm
Measuring speed**	<0.25sec
Camera	Industrialised ultra high resolution mounted in a protective enclosure
Computer	Dell, Windows 11
Screen	20 inch flat screen or better
Peripheral equipment	Keyboard and optical mouse
Proprietary InspecVision software	Inspection, SPC, Reporting, Reverse engineering
Data cable	USB 2 or USB3
Computer cabinet (Optional)	Industrial dust-proof enclosure
Light table construction	Welded Steel Enclosure
Light table measuring surface	Laminate glass, toughened with integral diffusion layer
Light source	LED Strip
Mast construction	Extruded aluminium
Power supply	230 Volt, 50Hz or 110 Volt, 60Hz on request, single phase,(Grounded mains plug to distribution hub supplied)
Power consumption	4 Amp maximum at 230 Volt, 7 Amp max at 110 Volt
Control panel	Control switches for power, camera and lights
EC directives	Compliant with Machinery, Low voltage and EMC Directives
Colour	Natural aluminium and RAL 5013 (cobalt blue)
Ambient operating conditions	10-30 degree C
Approx Footprint/installed width/ depth/ height/ weight of installed Light table and Mast (no options)	1311mm (W) x 996mm (D) x 2633mm (H) <250kgs
Approx Footprint/installed width/ depth/ height/weight of installed Computer Cabinet (inc keyboard tray) <i>Optional</i> Standard packing	710mm (W) x 474mm (D) x 1740mm (H) <100kgs Wooden crate
Warranty	One year limited warranty on hardware and software
Optional extended warranty	Two or three year extended warranty (requires software upgrade option)
Software support option	Annual support contract provides free software upgrades

*The first accuracy value specifies the accuracy achieved over most of the table,

the second accuracy value specifies the accuracy achieved at table edges

**Accuracy results are verified on standard production machines using tests based on ISO 10360

Actual measuring accuracies achieved will depend on operating environment, user input, quality and condition of materials

Errors and omissions excepted

Due to our policy of continuous improvement specifications are subject to change without notice, please contact factory or your InspecVision dealer

Non-standard hardware, software or acceptance tests must be defined prior to purchase



Manufacturer:

InspecVision Ltd

10 Trench Road

Mallusk

Newtownabbey BT36 4TY

Co Antrim United Kingdom

Telephone: +44 (0) 28 90 844 012

Telefax: +44 (0) 870 706 1614





Email: Info@InspecVision.com

Web Address: www.InspecVision.com





Distributor Details:

P70.20 Schematic

DIMENSIONS IN BRACKETS ARE IN INCHES
SCALE: 1:20

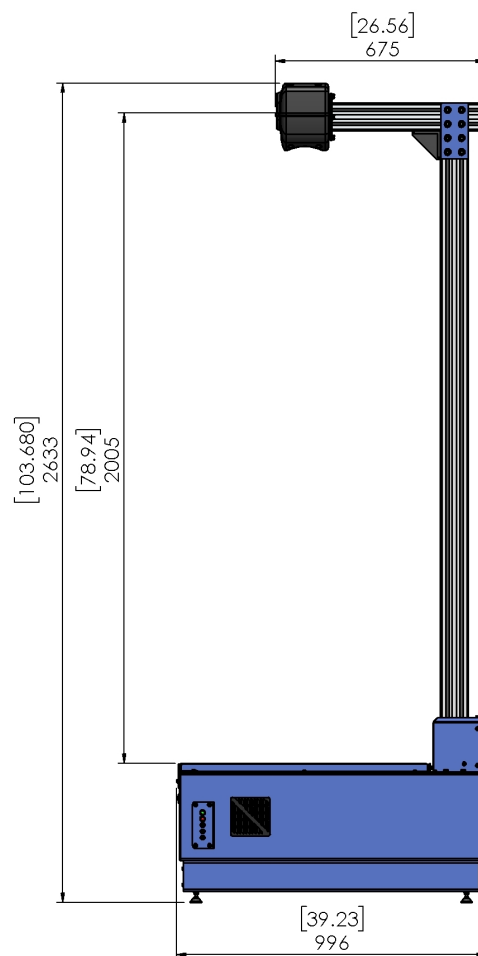
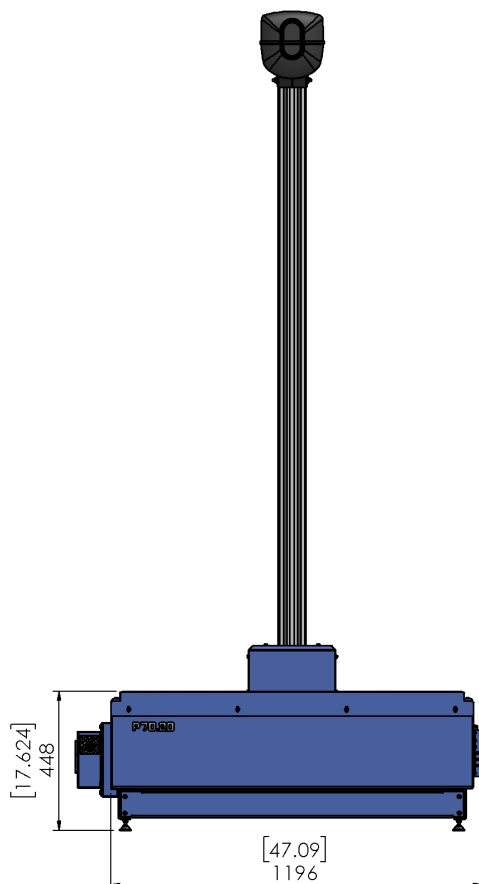
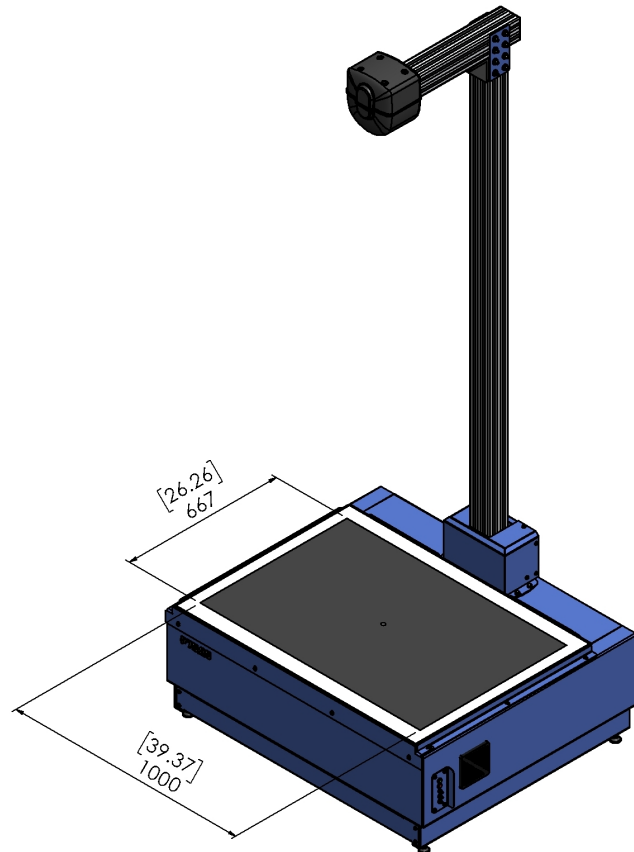
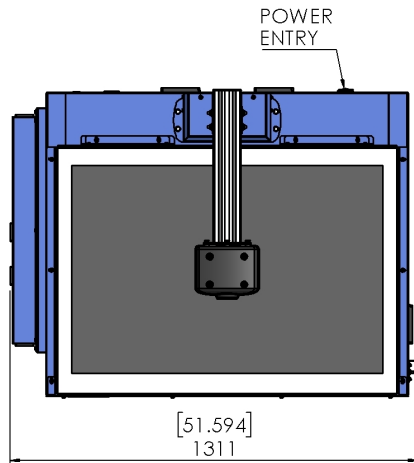


P70.20 Schematic with Base Unit

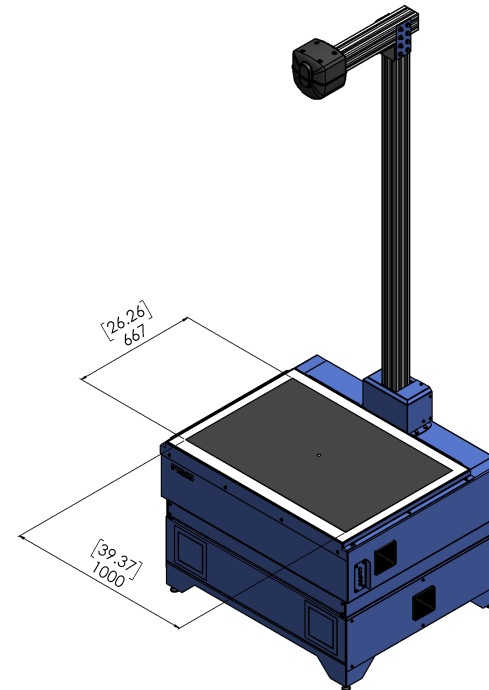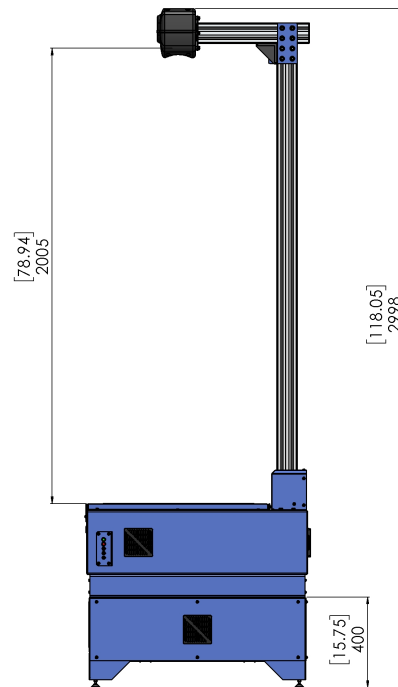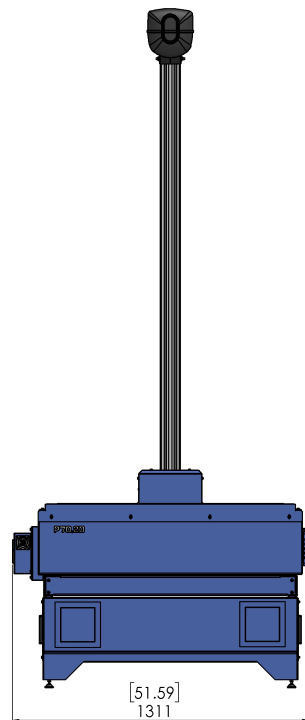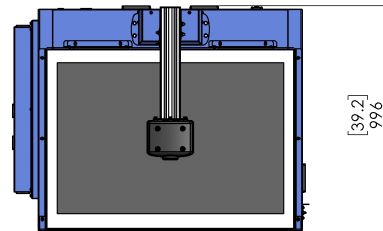

DIMENSIONS IN BRACKETS ARE IN INCHES

P70.20 Schematic with Glass Flattening

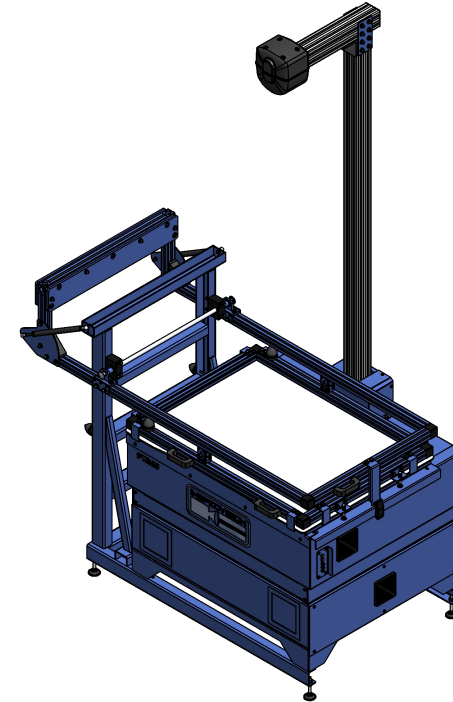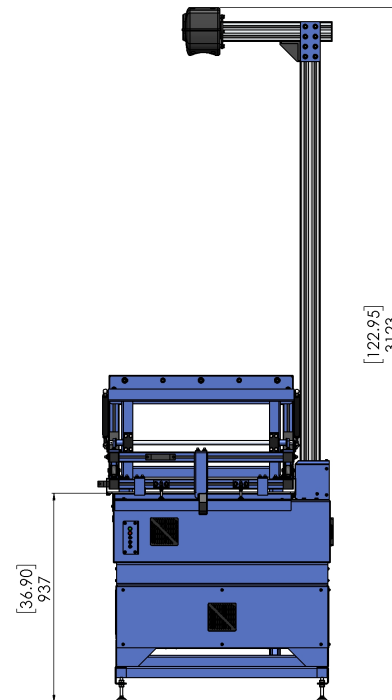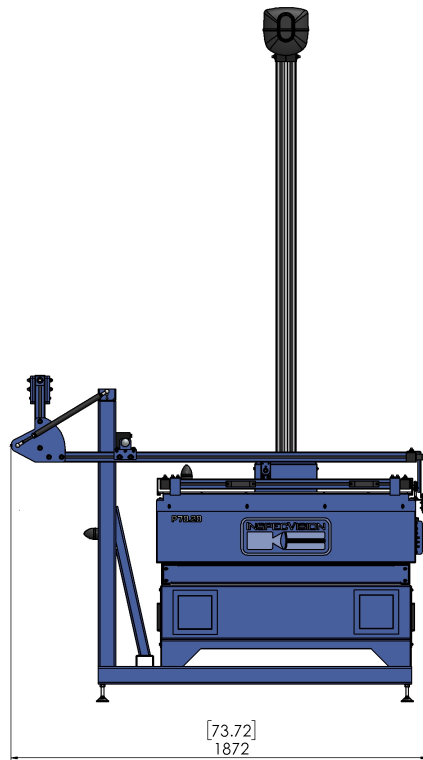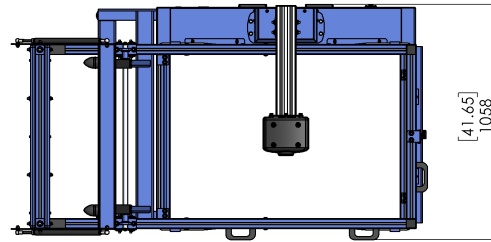

DIMENSIONS IN BRACKETS ARE IN INCHES